




1024 NOTES 32 TUNES
DUAL TONE MELODY

按鍵控制音量
雙音音樂聖誕燈串 IC

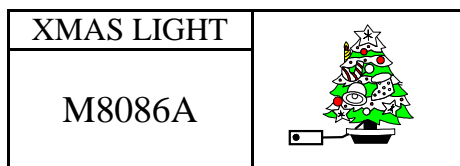

FEATURES 功能敘述

- VOL: 按鍵調節音量 大, 中, 小, 無 四段.
- SEL: Section select.
- Maximum 32 songs.

APPLICATION 產品應用



- Xmas light control etc..

ELECTRICAL CHARACTERISTICS 電氣規格

(@V_{DD}=4.3V unless otherwise specified)

Characteristics	Sym.	Min.	Typ.	Max.	Unit	REMARKS
工作電壓 Operating Voltage	V _{DD}	—	4.3	5	V	
工作電流 Operating Current	I _{OP}	—	—	2	mA	No load
推動電流 BZ Driving Current	I _{OH}	—	0.2	—	mA	@ V _{DS} =1V
振盪頻率 Oscillator Frequency	F _{OSC}	—	100	—	KHz	External± 30%, R _{osc} =220KΩ
工作溫度 Operating Temperature	Temp.	0	25	60	°C	

APPLICATION DIAGRAM 參考電路圖

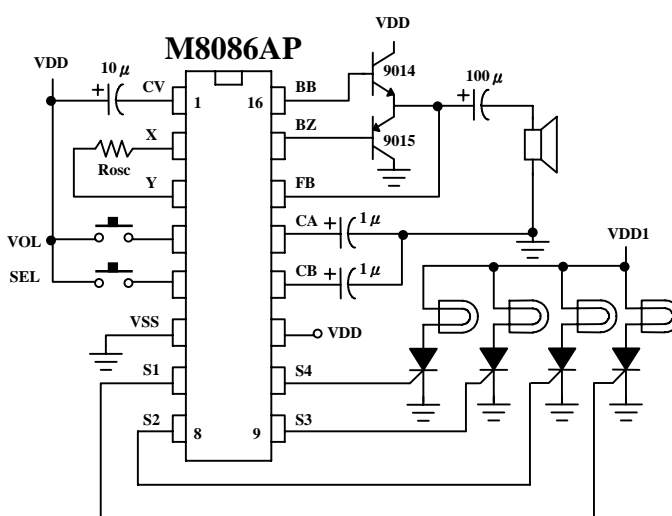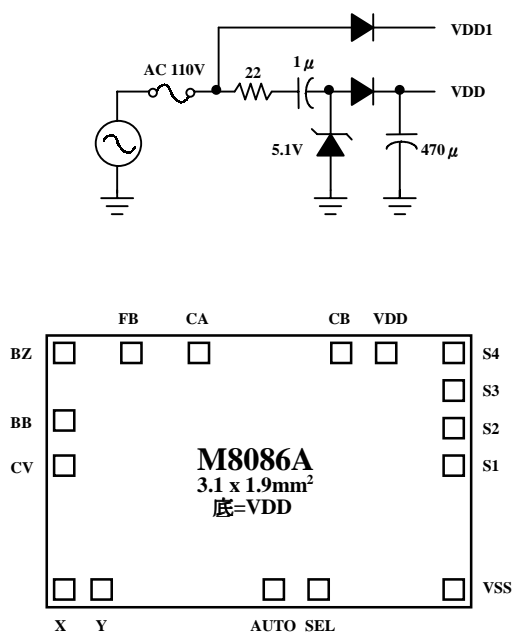


* All specs and applications shown above subject to change without prior notice.
(以上電路及規格僅供參考,本公司得逕行修正)



1024 NOTES 32 TUNES
DUAL TONE MELODY

按鍵控制音量
雙音音樂聖誕燈串 IC

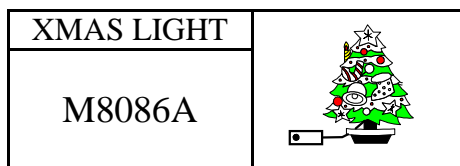

MODE FORMAT

MODE	LIGHT	MELODY
M1	同時	同步
M2	2 組交替	同步
M3	1 燈跑馬	同步
M4	2 燈跑馬	同步
M5	M1~M4 循環	同步
M6	M1~M4 循環	靜音
M7	全亮	靜音

SONG LIST

- | | |
|-------------------------------------|-----------------------------------------|
| 1. JINGLE BELLS | 12. O COME, ALL YA FAITHFUL |
| 2. SILENT NIGHT | 13. FROSTY THE SNOW MAN |
| 3. WE WISH YOU A MERRY XMAS | 14. WHITE XMAS |
| 4. SANTA CLAUS IS COMING TO TOWN | 15. THE LITTLE DRUMMER BOY |
| 5. HARK! THE HERALD ANGELS SING | 16. THE TWELVE DAYS OF XMAS |
| 6. ANGELS WE HAVE HERAD ON HIGH | 17. O LITTLE TOWN OF BETHLEHEM |
| 7. JOY TO THE WORLD | 18. HERE COME SANTA CLAUS |
| 8. O XMAS TREE | 19. GOD REST YOU MERRY, GENTLE MEN HARK |
| 9. THE FIRST NOEL | 20. SILVER BELL |
| 10. DECK THE HALLS | 21. WINTER WONDERLAND |
| 11. RUDOLPH, THE RED-NOSED REINDEER | |